

SOLARIS PLUTO 1000


www.lbtpro.com / info@lbtpro.com

- LED Qty : 19x15w RGBW
- Zoom : 8-50°
- IP20

MOST RELIABLE
&
VERSATILE



HOT **SELLING PRODUCT**

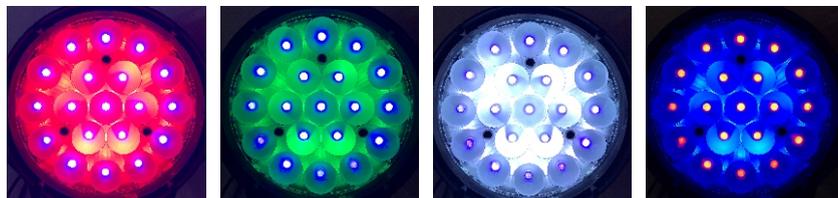

Product Features

Extremely small, fast and powerful LED Moving Head Beam Zoom Light;
Wide zoom range from 8° to 50°;
Equips RGB background LED;
Great built-in lighting shows programs under master/slave mode;
Blue LCD display for easy navigation;
Perfect for stage, theater, TV, studio, rental and discotheques.

Technical Parameters

Light Source

LEDs: 19pcs 15W RGBW 4in1 high brightness LED Lamps
Backlight LED: 30pcs 0.18W RGB 3in1 LED
Color: RGBW 4in1 colorful
Service life: 500000h

Optical System

Beam angle: 8-50°
Dimmer: 0-100 linear dimmer
Strobe: 1-25time/s

Light Output

Optimal projection distance: 3-15m
Illuminance: 41100lux@2m(8°), 6600lux@2m(50°)

Electromechanical Effects

Zoom: 8-50°
Effects: backlight effect, zoom wash effect

Movement

Pan: 540°, with 16 bit rotate
Tilt: 270°, with 16 bit rotate

Control and Programming

Control mode: DMX-512; Master/slave mode; Demo mode; Sound active
DMX channel: 14CH, 25CH
Control panel: LCD display + 4 buttons

Thermal Specification

Maximum ambient temperature: 45 °C (113 °F)
Maximum surface temperature: 170 °C (338 °F)

Electrical Specification

Power supply: Electronic auto-ranging
Input voltage range: AC90-240V, 50/60Hz
Power consumption: 300W

Mechanical Specification

Light size: 328Dx188Wx395Hmm
Weight: 7.7kg
Material: ABS
Appearance color: black

Using Environment

IP rating: IP20
Working temperature: -25-40°C
Cool system: Fan, Aluminum radiator

Installation

Installation style: hanging/stand
on floor/connection pieces by
pieces/stand on tripods
chargeable

Package

Carton:
38*26*48cm(1pcs/carton)

